



KISTNER CONCRETE  
PRODUCTS INC.  
8713 READ ROAD  
E. PEMBROKE, N.Y.  
14056  
(716) 894-2267

PRODUCT DESIGNATION

"O" RING & TAR JOINT INSTALLATION


DWG. NO.

MH-MHOTI  
11-5-92

©

SEALANT APPLICATION

4' DIA. - 1 STRIP  
5' DIA. - 1.5 STRIPS  
6' DIA. - 2 STRIPS  
8' DIA. - 2 STRIPS  
10' DIA. - 2.5 STRIPS  
PER POINT OF APPLICATION.  
(MANUFACTURER RECOMMENDS  
TWO APPLICATION POINTS PER  
JOINT AS SHOWN IN DETAIL.)

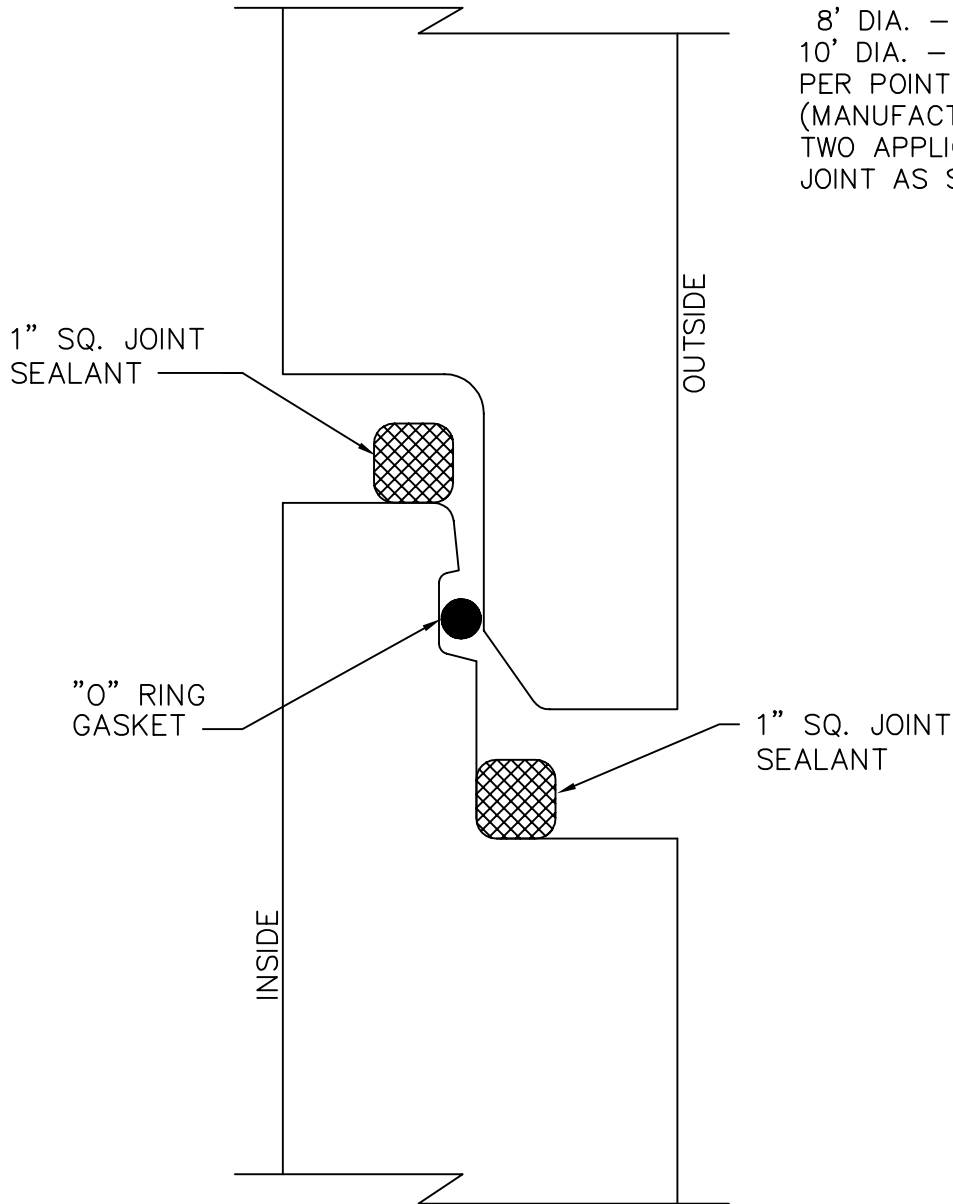

NOTES:

1. "O" RING GASKET - SEE INSTALLATION INSTRUCTIONS.
2. A TAR JOINT MUST BE APPLIED TO ALL MANHOLES.